

## Current/voltage testers

### PAN Allrounder 200AD


Easy to use like a voltage tester, versatile like a multimeter:  
**Current/ voltage tester with LED + LCD display 1000V, 200A AC/DC  
 True RMS**

- Water and dust protection class IP 64
- Low voltages up to 24 V: green LEDs, dangerous voltages from 230 V: red LEDs
- Analog LED and backlit digital LCD display
- **2-pole rotary field indication**
- **Non contact voltage test (3 levels) (NCV)**
- **Single-pole phase testing with acoustic alarm**
- Data-Hold
- Diode test
- **LED flashlight**
- **Vibrate alert and beep for confident feedback in any environment**
- Auto power off

**Scope of delivery:** test leads, screw-contact sleeves for perfect contact in sockets, Operating manual



Technical Data	PAN Allrounder 200AD
DC voltage (V=)	0,1 V - 1500 V
AC voltage (V~)	0,1 V - 1000 V
DC current (A=)	0,1 A - 200 A
AC current (A~)	0,1 A - 200 A
Resistance (Ω)	1 Ω - 100 kΩ
Continuity test (•)))	< 40 Ω / < 500 kΩ
Frequency (Hz)	1 Hz - 800 Hz
Jaw opening ø	15 mm
Dimensions	197 x 63 x 36 mm
Weight (gross / net)	494 / 296 g
Required battery(s):	2 x 1,5V AAA
Measuring category (CAT)	CAT III 1000 V / CAT IV 600 V
Accuracy (%)	3 % - 5 %

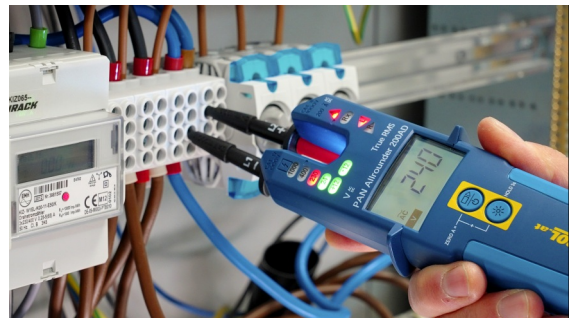

PAN Allrounder 200AD Video DE: [PAN Allrounder 200AD Video EN:](#)

